



Modular Flake-Ice Machine up to 120 Kg

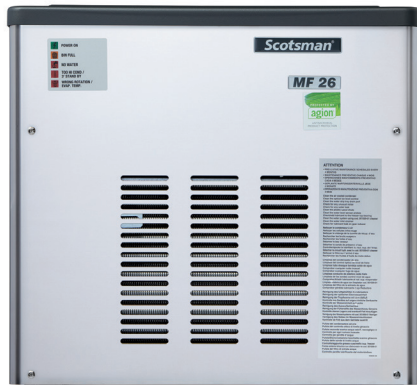


PS plastic top cover



Electronic Controls



Stainless Steel

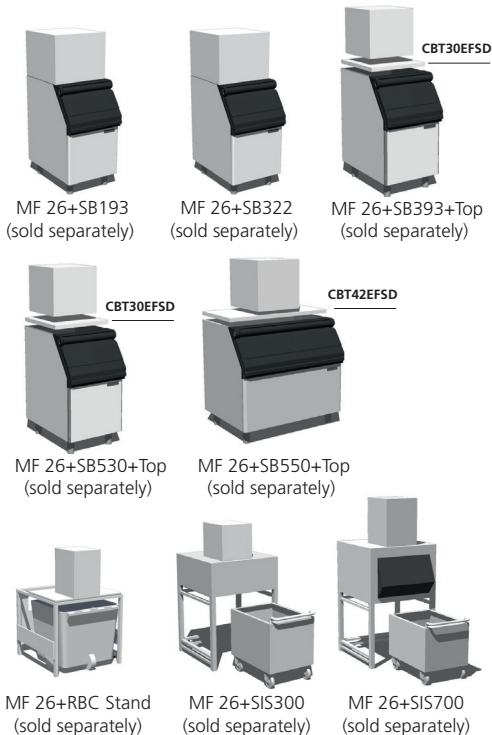

Features

- Modular Flake-ice machine, production up to 120 kg in 24 hours.
- Stainless steel "scotch-brite" finish; rounded corners for enhanced aesthetics and ergonomics; top cover in PS plastic.
- Removable side panels on all four sides to aid routine maintenance and servicing.
- Sturdy evaporator in stainless steel AISI304, auger in AISI430.
- State of the art ice Breaker in special alloy.
- Reduced-maintenance, self-lubricating gear-reducer.
- Oversized hermetic compressor.
- Choice of air or water-cooled condenser.
- Electronic control board with self diagnostic and malfunction alarms.
- Produces Flake Ice, extruded at a temperature just below 0°C, with 25% residual water content, hence very rich in moisture.
- CFC-free R 134a Refrigerant

MF 26 Technologies



	+C° -C°	10°: 10°C		21°: 15°C		 [WxDxH mm] 564x536x531	
		[kg]	[lbs]	[kg]	[lbs]		
MF 26 AS		120	264	110	242	[WxDxH inches] 223/16" x 211/8" x 207/8"	
MF 26 WS		120	264	106	234		
						 [v/Hz/ph] 230/50/1	 R 134 a



Residual water content 25%

Ice in its most natural form, made at a temperature just below zero degrees Celsius, with 25% residual water content, making it very moist. Its flake shape makes it extremely versatile and very simple to use effectively.

This product qualifies for the following listings:



2 Years Warranty


Subject to certain limitations and exclusions

Certified ISO 9001

www.scotsman-ice.it
www.scotsman-ice.com

Models and specifications are subject to change without notice.

Modular Flake-Ice Machine up to 120 Kg

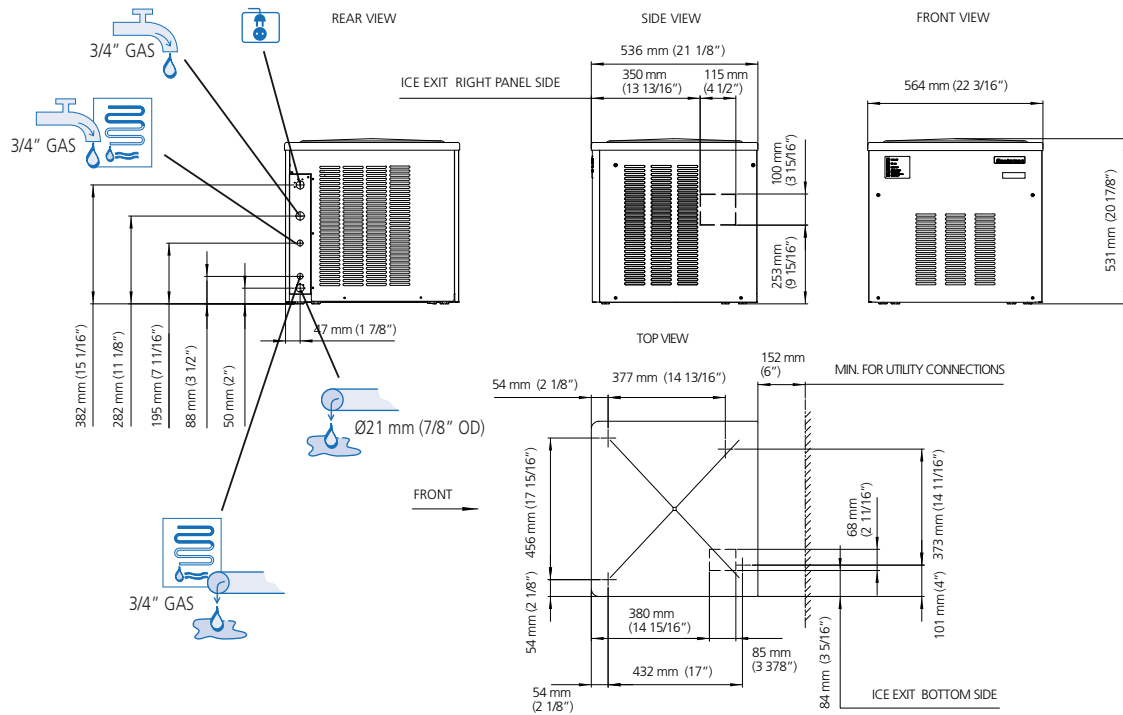

MF 26 AIR COOLED

°C \ °F	°F				kg
	50°	60°	70°	90°	
10°	120	116	112	104	kg
50°	264	256	247	229	lbs
21°	114	110	106	98	kg
70°	251	242	234	216	lbs
32°	103	99	95	87	kg
90°	227	218	209	192	lbs
38°	96	92	88	80	kg
100	212	203	194	176	lbs



MF 26 WATER COOLED

°C \ °F	°F				kg
	50°	60°	70°	90°	
10°	120	116	112	104	kg
50°	264	256	247	229	lbs
21°	110	106	102	94	kg
70°	242	234	225	207	lbs
32°	105	101	97	89	kg
90°	231	223	214	196	lbs
38°	103	99	95	87	kg
100	227	218	209	192	lbs



Minimum	Maximum
10°C (50°F)	40°C (104°F)
5°C (41°F)	35°C (95°F)
-10%	+10%
1 BAR 14 psi	5 BAR 70 psi

	Icon	Unit	Value	Unit	Value	Unit	Value	Unit	Value	Unit	Value	Unit	Value	Unit											
MF 26 AS	Icon: Air Cooled	[Btu/h]	4090	[W]	1200	[Ømm²]	3 x 1,5	[W]	500	FUSE	10 A	[kWh] - 100 Kg	11.6	[l/h]	4,6	[gal/h]	1	[kg]	45	[lbs]	99	[kg]	52	[lbs]	115
MF 26 WS	Icon: Water Cooled	[Btu/h]	4090	[W]	1200	[Ømm²]	3 x 1,5	[W]	500	FUSE	10 A	[kWh] - 100 Kg	11.3	[l/h]	29	[gal/h]	7,6	[kg]	45	[lbs]	99	[kg]	52	[lbs]	115

IMPORTANT NOTICE:
 Models and specifications are subject to change without notice.
 This spec sheet is meant for commercial purpose only.
 For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com