

Modular Super-Flake Ice Machine up to 320 Kg/24h.

Other models in this range:
MF 46 - MF 56 - MF 58 Split
MF 59 Split - MF 68 Split - MF 69 Split
MF 66 - MF 86 - MF 88 Split



PS plastic top cover



Electronic Controls



Stainless Steel







Features


- Modular Superflake ice machine, production up to 320 kg in 24 hours
- Hermetic compressor
- Air-cooled condenser
- Stainless steel auger and freezing cylinder (evaporator)
- Equipped with an electronic control board
- Ice breaker made in specially strengthened alloy, allowing for greater extrusion pressure to deliver a dryer-quality of ice (85% dry)
- Long-lasting stainless steel ball-bearings
- Double protection - electronic rotation sensor and drive coupling-on gear motor and gear reducer
- Low- water sensor protection on refrigeration and gear motor system
- Optical ice level sensor for machine shut down
- Stainless steel side panels in scotch-brite finish, with rounded corners for enhanced ease of cleaning and aesthetics
- Side panels are removable on all four sides to ease maintenance and after-sales service operations
- PS plastic top cover
- Reduced height to ease installation
- **R290 Refrigerant (150 grams charge)**

Optional Features (special order):

- UV lamp for bacterial control
- Anti-scale, anti-algae water filtration system

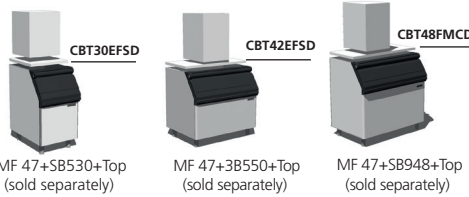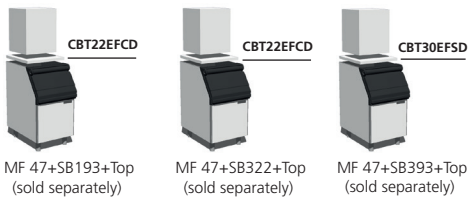

MF 47 Technologies



	+C°				
	-C°	10°: 10°C	21°: 15°C		
		[kg]	[lbs]	[kg]	[lbs]
MF 47 AS		320	704	270	594
					[WxDxH mm] 538X663X650
					[WxDxH inches] 213/16 x 261/8 x 259/16
					[v/Hz/ph] 230/50/1
					R290



Super-flake ice, extruded just below 0° Celsius, retains only 15-18% of residual water, making it relatively dry and compact.

Residual water content 15%

This product qualifies for the following listings:



2 Years Warranty

Subject to certain limitations and exclusions


Certified ISO 9001

www.scotsman-ice.it
www.scotsman-ice.com

Models and specifications are subject to change without notice.

Modular Super-Flake Ice Machine up to 320 Kg/24h.

Other models in this range:
MF 46 - MF 56 - MF 58 Split
MF 59 Split - MF 68 Split - MF 69 Split
MF 66 - MF 86 - MF 88 Split

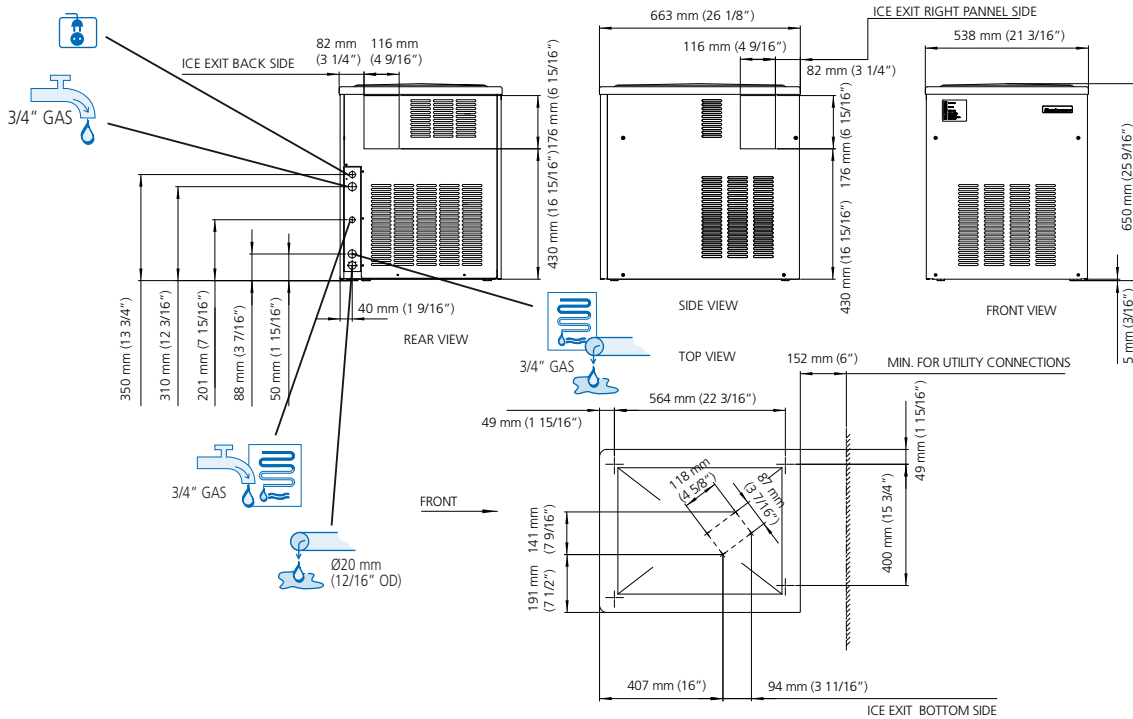

MF 47 AIR COOLED

°C	°F				kg
	50°	60°	70°	90°	
10°	320	305	290	260	kg
50°	704	671	638	572	lbs
21°	285	270	255	225	kg
70°	627	594	561	495	lbs
32°	245	230	215	185	kg
90°	539	506	473	407	lbs
38°	230	215	200	170	kg
100	506	473	440	374	lbs



Minimum	Maximum
10°C (50°F)	43°C (109°F)
5°C (41°F)	35°C (95°F)
-10%	+10%
1 BAR 14 psi	5 BAR 70 psi

	Refrigerant	Capacity	Water Inlet	Power	FUSE	Energy	Water	Ice	Weight
MF 47 AS	R290	2800 [Btu/h] / 830 [W]	3x1.5 [Ømm ²]	1000 [W]	16 A	10,6 [kWh] - 100 Kg	9 [l/h] / 2.4 [gal/h]	78 [kg] / 172 [lbs]	87 [kg] / 192 [lbs]

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com