

Other models in this range:
 MAR 78 - MAR 108 - MAR 128
 MAR 308
 Compact versions:
 MAR 56 - MAR 76 - MAR 106 - MAR 126
 MAR 206 - MAR 306

Scale Ice Maker Units up to 1850 kg



ABS Ice Chute Cover: sold separately.



Gear box protection (hall effect)



Pulleys & belt system allows to modify ice thickness



Features

- Daily production up to 1850 kg in 24 h (@ 1 mm. ice thickness).
- Scale ice machine, in "split system" version; evaporator only.
- Storage bin not supplied, to be purchased separately.
- To be connected to condensing unit or central cooling system (low temperature).
- AISI304 stainless steel evaporator and ice scraper blade.
- Redesigned evaporator compartment end-walls.
- Electromechanical control panel.
- Electrical protections, rotation speed & reverse phase controls.
- Low- water sensor protection.
- Supplied w/expansion valve, solenoid valve, pressure regulating valve (KVP), heat exchanger.
- Drive motor / gear reducer with V-Belt drive.
- Storage bin thermostatic ice level sensor.
- Stainless steel panels in scotch-brite finish, with rounded corners, easy to remove for maintenance.

Accessories & Optional Features (to be specified upon order):

- Ice spout cover
- Ice chute extension 90cm
- Double ice chute 65cm
- Infrared ice sensor (replaces the thermostatic ice level control)
- UV lamp water sanitising system for bacterial control
- ON/OFF manual switch, with weekly programmable timer



MAR 208+RBC STAND (sold separately)



MAR 208+UBH2250 (sold separately)



MAR 208+B3200 (sold separately)




MAR 208+B4600 (sold separately)



MAR 208+ITS2250 (sold separately)



MAR 208+SIS1350 (sold separately)



MAR 208+ITS3250 (sold separately)

MAR 208 Technologies



		THICK ICE	THIN ICE		[WxDxH mm] 1326x853x520
					[WxDxH inches] 52 3/16 x 33 9/16 x 20 8/16
MAR 208		[kg] [lb]	[kg] [lb]		
		1650 3630	1850 4065		
	[V/Hz/ph] 400/50/3N	R404A			

This product qualifies for the following listings:



Residual water content 2%

Ice scales are the coldest form of ice. Formed at -6° to -12°Celsius, they are very dry, containing less than 2% residual water. Scales look like fragments of glass, have an irregular shape and a thickness that can be adjusted at 1 or 2 mm.

2 Years Warranty

Subject to certain limitations and exclusions


Certified ISO 9001

www.scotsman-ice.it
www.scotsman-ice.com

Models and specifications are subject to change without notice.

Other models in this range:
 MAR 78 - MAR 108 - MAR 128
 MAR 308
 Compact versions:
 MAR 56 - MAR 76 - MAR 106 - MAR 126
 MAR 206 - MAR 306

Scale Ice Maker Units up to 1850 kg

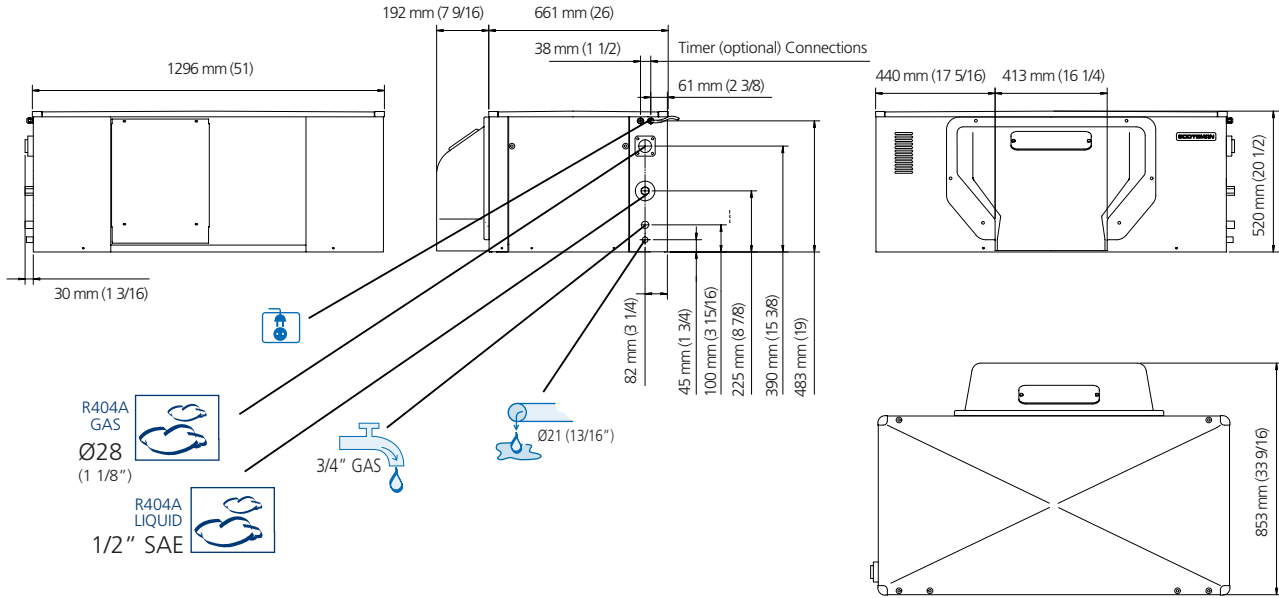

Minimum		Maximum
10°C (50°F)		43°C (110°F)
5°C (41°F)		38°C (100°F)
-10%		+10%
1 bar 14 psi		5 bar 70 psi

	 [V/Hz/ph]	 R404A/R507 (T ev: -20°C or -4°F; T cond. +40°C or 104°F) [W] [Btu/h]	 [W] [A]	 [kg] [lb]	 [kg] [lb]
MAR 208	400/50/3N	9850 33589	370 1.2	200 440	224 493